

Comercialite 22" High bay

Construction

- Hydroformed body and reflector
- Anodized pure aluminum
- Reduced weight
- Open or enclosed versions available
- Emergency auxiliary lamp option
- Several mounting options
- Safety wire

Advanced optics

- Energy savings
- High efficiency with 86% CU
- Require 20% fewer fixtures
- Prevents lamp overheating
- Adjustable lamp position
- Low glare

Ballast

- Super low loss with only 6% losses
- Epoxy encased
- Quiet operation without hum
- Moisture resistant
- Ignitor for reliable start
- Shorter restrike time

SO EFFICIENT THAT IT PAYS ITSELF BACK IN
TWO TO THREE YEARS


MORE DOWNLIGHT , AND BETTER SUITED FOR
MOST APPLICATIONS THAN ACRYLIC REFRAC -
TORS



Coefficient of utilization for Zonal cavity method

	80%			70%			50%			30%			10%			0%		
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	
1	0.94	0.90	0.88	0.92	0.88	0.87	0.88	0.86	0.84	0.85	0.83	0.82	0.82	0.80	0.79	0.78		
2	0.85	0.80	0.77	0.83	0.80	0.76	0.81	0.77	0.75	0.78	0.75	0.73	0.76	0.73	0.71	0.70		
3	0.76	0.71	0.67	0.75	0.70	0.66	0.73	0.68	0.65	0.71	0.67	0.64	0.69	0.65	0.64	0.61		
4	0.71	0.65	0.61	0.70	0.65	0.63	0.68	0.64	0.60	0.66	0.62	0.59	0.65	0.61	0.58	0.57		
5	0.65	0.59	0.55	0.64	0.59	0.54	0.63	0.58	0.54	0.61	0.57	0.54	0.60	0.56	0.53	0.51		
6	0.60	0.54	0.49	0.59	0.53	0.49	0.58	0.53	0.49	0.56	0.52	0.48	0.55	0.51	0.48	0.47		
7	0.54	0.48	0.44	0.54	0.48	0.44	0.53	0.47	0.43	0.51	0.47	0.43	0.50	0.46	0.43	0.41		
8	0.50	0.44	0.39	0.49	0.43	0.39	0.48	0.43	0.39	0.47	0.42	0.39	0.46	0.42	0.38	0.37		
9	0.46	0.40	0.36	0.46	0.40	0.35	0.45	0.39	0.35	0.44	0.39	0.35	0.43	0.38	0.35	0.34		
10	0.42	0.36	0.32	0.42	0.36	0.32	0.41	0.35	0.32	0.40	0.35	0.32	0.39	0.35	0.31	0.30		

Floor cavity reflectance is 20%

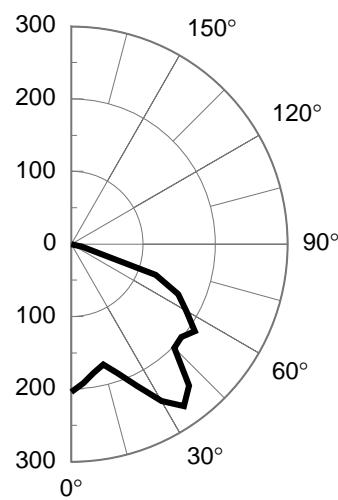

Bekolite

Centeno 823
Mexico D. F. 08400

www.bekolite.com
011.52.5.657.0247 fax

Granjas Mexico
Mexico

sales@bekolite.com
011.52.5.657.0300